

# MONUMENT RECORD

Corner I.D. #


0-14

STATE OF INDIANA - COUNTY OF MONROE

Section Twenty-two, 22, Township 9 North, Range 1 East

Monument Description & Remarks: Found .5'x.5' Stone with .5' exposed at  
SW Corner of NW 1/4 of NE 1/4. Steel fence post adjacent. Witnessed 6/29/83.

Recovery Tie Drawing

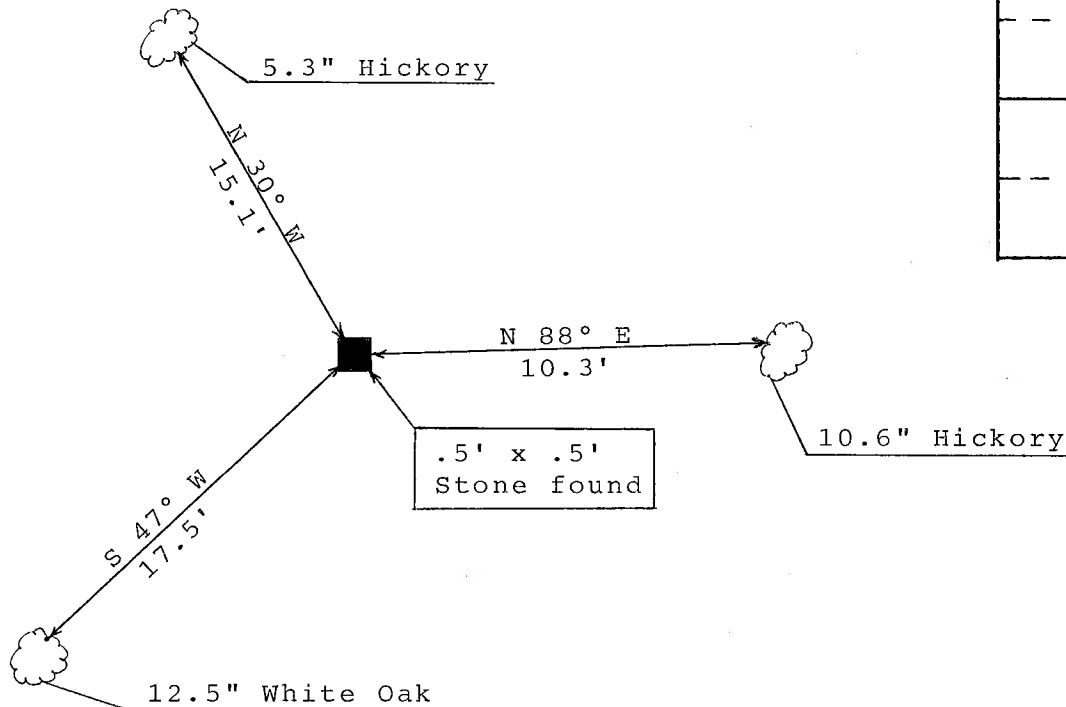

● At Corner



Not To Scale

State of Indiana  
County of Monroe

I, Michael W. Friley, County Surveyor, hereby certify  
that this document was prepared under my direction in  
accordance with the provisions of Section 17-3-64-4  
through 17-3-64-8 of the Indiana Code, being Acts of 1965,  
Chapter 319; and the above data is given under my hand and  
seal this 18th day of October, 19 93 A.D.

Space  
Reserved For  
Recording  
Officer

Indiana Registered Land Surveyor No. \_\_\_\_\_ or

Morgan-Monroe State Forest  
United States Government Agency

Bill Hahn, Property Manager  
Title

Field Book:

n/a

Page:


n/a

## SECTION 22, T 9 N, R 1 E

1. On June 29, 1983, I located and marked the EW line on the S side of the N $\frac{1}{2}$ , NE $\frac{1}{4}$ . Double boundary signs were placed at turning corners and single boundary signs were placed at  $\frac{1}{4}$  mile marks. The NS line on the W side of the N $\frac{1}{2}$ , NE $\frac{1}{4}$  was also located and marked. Mr. Lonnie McClung assisted me in locating these lines. A cornerstone was located at the SW corner of the NW $\frac{1}{4}$ , NE $\frac{1}{4}$  and was witnessed as follows: weather, sunny and hot; stone measured .5' X .5' with .5' exposed, it was 15.1' to a 5.3" hickory bearing <sup>N 30° W</sup> 330°, 10.3' to a 10.6" hickory bearing <sup>N 88° E</sup> 088°, 17.5' to a 12.5" white oak bearing <sup>S 47° W</sup> 227°. A steel fence post was driven next to the stone.

Bill Hahn, Property Manager

2. On June 2, 1986, I taped 660' (1/8 mile) from the stone (witnessed on same day-- see SEC 21 note) to the corner of the W $\frac{1}{2}$  of SW $\frac{1}{4}$ , SW $\frac{1}{4}$  of SEC 22. Also the W line of the NW $\frac{1}{4}$ , SW $\frac{1}{4}$  of this section was painted and the stone witnessed (see SEC 21 notes). No clear cut evidence was found to substantiate the taped corner; however, a hickory tree with wire was within 10' from the taped corner. No boundary signs or paint was applied to the flagline.



David Vadas, Timber Specialist

3. On January 8, 1988 I adjusted the N and E lines of the W $\frac{1}{2}$ , SW $\frac{1}{4}$ , SW $\frac{1}{4}$ , Sec. 22 and painted in and posted the lines. The adjustment on the N line was 2 paces N in 122.5 paces E along the reference line. The NE corner was a SFP set by me earlier at the approximate corner. The adjustment for the E line was 5 paces E in 245.5 paces south. The 3 wired fence corner appears to be a good corner as a stone E and W of the fence corner appear to line up with it. Also there is a good tree line to the south, with wire in it. Boundary signs were placed about every 50 paces or where ravines or ridgetops were encountered.

David Vadas Timber Specialist

